



03-084

TRAILER HITCH

WILL FIT YAMAHA® DRIVE®

INSTALLATION INSTRUCTIONS

INCLUDED:

Trailer Hitch

TOOLS NEEDED:

Socket
Wrench



Trailer Hitch

We recommend professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your cart's body.


Switch key to OFF position and set parking brake.

1



Place trailer hitch against frame. Align holes with vertical section of rear frame. Insert hardware.


2

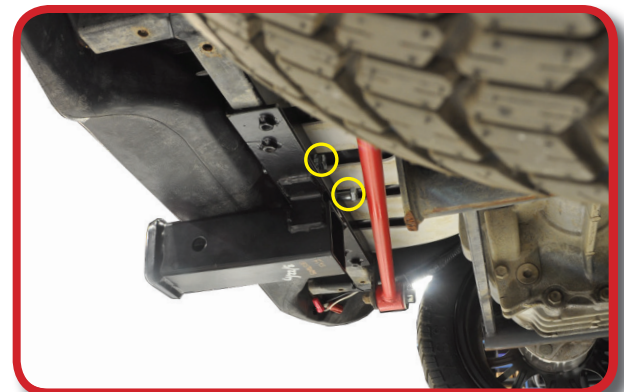

3
Mark holes to be drilled. If you are installing on a lifted cart, use the outer bolts. If you are installing on a non-lifted cart, mark the inner bolts as shown. Existing 10mm bolts will need to be removed before drilling.




4
Insert hardware through bagwell into trailer hitch as shown.

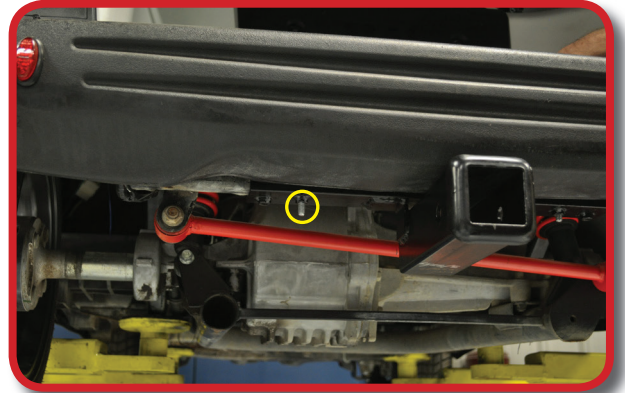

5
Insert washers and bolts into trailer hitch as shown.



6
Tighten all hardware.

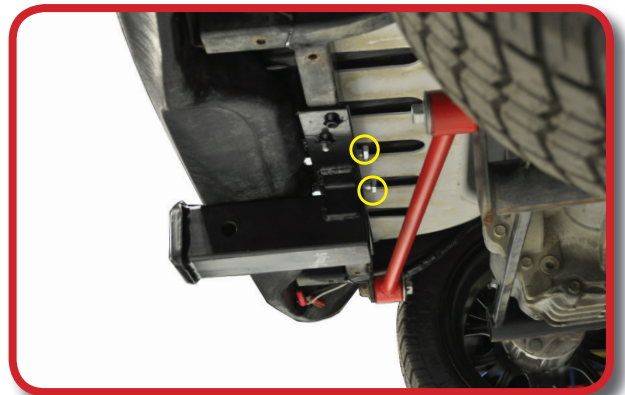

INSTALLATION COMPLETE

Yamaha®, G-14®, G-19®, and G-22® are registered trademarks of Yamaha Golf-Car Company and Yamaha Motor Corporation ("Yamaha"). Reference to Yamaha's trademarks and products is only for purposes of identifying golf carts with which this GTW product is compatible. GTW products are aftermarket parts and are not original equipment parts. GTW is not connected or affiliated with or sponsored by Yamaha Motor Corporation or Yamaha Golf-Car Company.